



Turcon® M12

UNRIVALED PERFORMANCE IN HYDRAULIC SEALING



Turcon® M12

Unrivalled performance in hydraulic sealing

Turcon® M12 from Trelleborg Sealing Solutions is a polytetrafluoroethylene (PTFE) based sealing material whose performance is unrivalled in key hydraulic sealing characteristics, such as friction, wear and high pressure operation.



No other material can give such universally exceptional performance

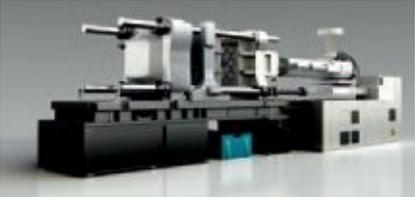
Extensive testing showed that Turcon® M12 is resistant to virtually all media, including a broad range of lubricants, and has outstanding wear resistance and friction characteristics. This cost-effective material also provides customers with extended seal life, as well as a wide operating window in terms of temperature, pressure and velocity. Comprehensive testing has shown that no other PTFE material can give such universally exceptional performance, and Turcon® M12 is now recommended by Trelleborg Sealing Solutions as the material of choice for a wide variety of hydraulic applications.

FEATURES AND BENEFITS OF TURCON® M12

- Resistant to virtually all media including a broad range of lubricants
- Outstanding wear resistance and friction characteristics
- Provides extended seal life
- Operates in wide temperature, pressure and velocity ranges
- Minimal abrasion of hardware, preventing damage to counter surfaces
- Robust for harsh environments
- Good resistance to extrusion
- Reduced environmental impact as it does not include bronze fillers
- Sealing material for universal use in hydraulic applications
- Lower stock holding and fewer items to handle
- Cost-effective solution

KEY APPLICATIONS

Turcon® M12 is the material of choice for a wide variety of hydraulic applications.

Segment	Application	Turcon® M12 advantages
<p>Fluid power</p> 	<ul style="list-style-type: none"> Hydraulic cylinders and actuators Giant cylinders Hydraulic jacks Clamping cylinders 	<ul style="list-style-type: none"> Compatible with all types of hydraulic fluid, including fluids with low lubrication performance Low abrasion Low friction for frequent movement Avoids hardware damage on counter surface
<p>Hydraulic machinery</p> 	<ul style="list-style-type: none"> Machine tools and machining centers Injection molding machines Hydraulic presses Press brake and punching machines Steel and rolling mills 	<ul style="list-style-type: none"> Low friction and suited to short stroke linear movement Compatible with all types of hydraulic fluid, especially those fluids with low lubrication performance Withstands constant activation High wear resistance Operates under high pressure Heavy duty
<p>Wind power</p> 	<ul style="list-style-type: none"> Hydraulic pitch cylinders Turbine piston accumulators 	<ul style="list-style-type: none"> Extended seal life reduces maintenance 24-7 operation
<p>Automotive</p> 	<ul style="list-style-type: none"> Cylinders for convertibles Shock absorbers Active body control 	<ul style="list-style-type: none"> Avoids damage to counter surfaces Low friction gives smooth movement Withstands high system pressure
<p>Mobile hydraulics</p> 	<ul style="list-style-type: none"> Lifting and telescopic cylinders Active suspension and stabilizer cylinders 	<ul style="list-style-type: none"> Withstands harsh environments High sealing efficiency Improved absorption of abrasive contaminants
<p>Rail</p> 	<ul style="list-style-type: none"> Shock absorbers 	<ul style="list-style-type: none"> Robust for difficult environments Superior for short stroke and high frequencies

DETAILED RESULTS OF TESTS

The Turcon® M12 matrix is medium-filled with a complex mix of non-abrasive mineral fibers combined with additives. Turcon® M12 and other PTFE based sealing materials were used to produce Turcon® Stepseal® 2K, Turcon® Twinseal, Turcon® Stepseal® V and Turcon® Slydring® . The seals underwent a number of stringent test regimes to measure performance in a variety of sealing parameters critical to the effective performance of seals within hydraulic applications.

Test		Compatibility with mineral oil and environmentally-friendly hydraulic fluids	Friction mapping – performance at different pressures and speeds	Friction force Turcon® Slydring®
Details	Lubricant	Mineral-based HLP 46 cSt. Synthetic ester-based, biodegradable fluid, 46 cSt.	Equivis ZS 46, viscosity 46 cSt. mineral oil	Equivis ZS 46, viscosity 46 cSt. mineral oil
	Cycles	200,000	30,000	100,000
	Stroke length	280 mm/ 11 in	200 mm/ 8 in	250 mm/ 9 in
	Total length	112 kilometers/ 70 miles	12 kilometers/ 7.5 miles.	50 kilometers/ 31 miles
	Pressure	30 MPa/ 4351 psi cycle on both sides of the test cylinder	10 to 30 MPa/ 1450 to 4350 psi cycle on both sides of the cylinder	Constant 2.5 MPa/ 362 psi Side load: 8 N/mm ²
	Velocity	0.20 m/s/ 0.66 ft/s	Between 0.05 m/s/ 0.16 ft/s and 0.30 m/s/ 0.98 ft/s	0.20 m/s/ 0.66 ft/s
	Temperature	+55 °C/ +131 °F	+55 °C/ +131 °F	+50 °C/ +122 °F
Result		<p>In mineral oil: Turcon® M12 matched the best-in-class materials and demonstrated the lowest friction force of all compounds. In addition, it had the smallest reduction in seal profile height, resulting in the lowest overall wear and deformation.</p> <p>In environmentally-friendly hydraulic fluids: Environmentally-friendly hydraulic fluids can create challenging environments for seals. In this test some compounds showed unacceptably high leakage. Turcon® M12 gave outstanding results in terms of leakage control, and the friction force of Turcon® M12 was extremely good with excellent stability. Reduction in radial height of the profile was comparable to best-in-class materials and extrusion was acceptable. Turcon® M12 is now recommended as the material of choice for use with environmentally-friendly hydraulic fluids.</p>	<p>In these tests the seal must operate within the opposing effects of pressure and velocity. As pressure increases, the contact area between the seal and the rod increases and friction becomes higher. At higher velocities, friction is reduced as the coefficient of friction is decreased by a higher oil film formation.</p> <p>At all pressures and velocities, Turcon® M12 had the lowest friction force.</p>	<p>In this test, the friction additives in Turcon® M12 demonstrate their positive effect, and after the run-in period the friction is lower than all other compounds tested. The material had the combined lowest wear and deformation, leading to extended life of the Slydring® .</p>

Note: All tests were performed with a ø 50mm/ 2 in hard chrome-plated rod.

	High-pressure wear test	Endurance Testing	Wear test – hydro pulse	Wear test – wind power specification
Lubricant	HLP 46, zinc-free mineral oil	HLP 46, zinc-free mineral oil	HLP 46, zinc-free mineral oil	HLP 46, zinc-free mineral oil
Cycles	1 million	16 million	1.3 million in 24 hours	1 million cycles both ways at a constant pressure
Stroke length	300 mm/ 12 in	300 mm/ 12 in	+/- 5 mm / 0.2 in	20 mm/ 0.8 in
Total length / Frequency	–	> 9500 km	Up to 15Hz	1Hz
Pressure	4 to 36 MPa/ 580 to 5221 psi	30 to 0 MPa/ 4351 to 0 psi	15 MPa/ 2175 psi	20 MPa/ 2900 psi
Velocity	0.14 m/s/ 0.46 ft/s (average, sine signal)	–	–	–
Temperature	+80 °C/ +176 °F	+60 °C/ +140 °F	+60 °C/ +140 °F	+80 °C/ +176 °F
	<p>These are extreme requirements for a seal, especially in zinc-free oil. The seals in Turcon® M12 showed virtually zero wear with no micro-scratching. The material performed better than any other Turcon® compound in this test.</p>	<p>Looking at the results in terms of friction behavior and wear over a test distance travelling more than 9500 km, prove the results of Turcon® M12's character strength in a Tribo stable system where the Turcon® M12 seals no longer function as wear parts.</p> <p>Low friction as well as low wear on the seal and on the counter surface, guarantee a stable Tribo-System with a resulting benefit of a long service life.</p>	<p>This test proved that Turcon® M12 prevents counter surface scratching. Even after 1.3 million cycles the grinding pattern is still visible on the rod with only slight polishing of the metal surface and no micro-scratching. Turcon® M12 is particularly suited to applications where there are short-stroke, high-frequency movements.</p>	<p>The chrome-plated surface of the rod was only slightly polished with no micro-scratching and no seal extrusion. Roughness values stayed very constant, which enabled the tribological system between seal contact area and counter surface to run in a defined area. The surface of the seal in Turcon® M12 showed virtually no wear.</p>
			 <p>Watch the film and find out more about Turcon® M12.</p> <p>Visit www.tss.trelleborg.com/films</p>	

LOCAL CONTACTS

EUROPE

Austria – Vienna (Slovenia)

+43 (0) 1 406 47 33

Belgium - Dion-Valmont (Luxembourg)

+32 (0) 10 22 57 50

Bulgaria – Sofia

(Azerbaijan, Belarus, Greece, Romania, Ukraine)

+359 (0) 2 969 95 99

Croatia – Zagreb (Albania, Bosnia and Herzegovina,

Macedonia, Serbia, Montenegro)

+385 (0) 1 24 56 387

Czech Republic - Rakovnik (Slovakia)

+420 313 529 111

Denmark – Copenhagen

+45 48 22 80 80

Finland – Vantaa (Estonia, Latvia)

+358 (0) 207 12 13 50

France - Maisons-Laffitte

+33 (0) 1 30 86 56 00

Germany - Stuttgart

+49 (0) 711 7864 0

Hungary – Budaörs

+36 (06) 23 50 21 21

Italy – Livorno

+39 0586 22 6111

The Netherlands - Rotterdam

+31 (0) 10 29 22 111

Norway – Oslo

+47 22 64 60 80

Poland – Warsaw (Lithuania)

+48 (0) 22 863 30 11

Russia – Moscow

+7 495 982 39 21

Spain – Madrid (Portugal)

+34 (0) 91 71057 30

Sweden – Jönköping

+46 (0) 36 34 15 00

Switzerland – Crissier

+41 (0) 21 631 41 11

Turkey – Istanbul

+90 216 569 73 00

United Kingdom - Solihull (Eire, South Africa)

+44 (0) 121 744 1221

Aerospace Hub Europe, North

(UK and Nordic Countries)

+44 (0) 121 744 1221

Aerospace Hub Europe, South & West

(Continental Europe and Middle East)

+33 (0) 1 30 86 56 00

Automotive Hub Europe

+49 (0) 711 7864 0

AMERICAS

Americas Regional

+1 260 749 9631

Brazil – São José dos Campos

+55 12 3932 7600

Canada Central – Etobicoke, ON

+1 416 213 9444

Canada East – Montreal, QC

+1 514 284 1114

Canada West – Langley, BC

+1 604 539 0098

Mexico - Mexico City

+52 55 57 19 50 05

USA, Great Lakes - Fort Wayne, IN

+1 260 482 4050

USA, East - Mt. Juliet, TN

+1 615 800 8340

USA, Midwest - Schaumburg, IL

+1 630 539 5500

USA, Northern California - Fresno, CA

+1 559 449 6070

USA, Northwest - Portland, OR

+1 503 595 6565

USA, Southwest - Houston, TX

+1 713 461 3495

Aerospace Hub Airframe

+1 303 469 1357

Aerospace Hub Distribution & Engineering

+1 260 749 9631

Aerospace Hub East

+1 610 828 3209

Aerospace Hub West

+1 310 371 1025

Automotive Hub North America

+1 734 354 1250

Automotive Hub South America

+55 12 3932 7600

ASIA PACIFIC

Asia Pacific Regional

+65 6 577 1778

China – Hong Kong

+852 2366 9165

China – Shanghai

+86 (0) 21 6145 1830

India – Bangalore

+91 (0) 80 3372 9000

Japan – Tokyo

+81 (0) 3 5633 8008

Korea – Seoul

+82 (0) 2 761 3471

Malaysia - Kuala Lumpur

+60 (0) 3 90549266

Taiwan – Taichung

+886 4 2382 8886

Vietnam – Ho Chi Minh City

+84 8 6288 6407

Singapore and all other countries in South and East Asia, Australasia

+65 6 577 1778

Aerospace Hub China

+86 (0) 21 6145 1830

Aerospace Hub Singapore

+65 6 577 1778

Automotive Hub China

+86 (0) 21 6145 1830

Automotive Hub India

+91 (0) 80 3372 9200

AFRICA, CENTRAL ASIA AND MIDDLE EAST

Africa & Iran (excluding South Africa (see UK))

+41 (0) 21 631 41 11

Central Asia (Armenia, Georgia, Kazakhstan,

Kyrgyzstan, Tajikistan, Uzbekistan)

+7 495 982 39 21

Middle East and Gulf Region

+359 (0) 2 969 95 99



Trelleborg is a world leader in engineered polymer solutions that seal, damp and protect critical applications in demanding environments. Its innovative engineered solutions accelerate performance for customers in a sustainable way. The Trelleborg Group has local presence in over 40 countries around the world.

WWW.TSS.TRELLEBORG.COM